

Blackhawk Paver Special



Paver Special FEATURES

- Air Suspension - ± 3 " adjustable ride height
- Full Width rear deck covered with 1.5" Apitong
- High lift gooseneck has over 35" of vertical travel.
- Simple one hand adjustment of deck height and /or fifth wheel setting. No doors, shims or spacers

Blackhawk Paver Special

35 ton and 55 ton models

Load capacity - 35 tons in any 16'-0" of deck

Load capacity - 55 tons evenly distributed over entire deck

- 50 tons in any 16'-0" of deck

Shown with optional extension brackets and outrigger planks.



- 35 and 55 ton models.
- Accommodates most rollers and pavers.
- Gentle climb angle.
- Adjustable width front ramps.
- 35" of vertical gooseneck travel.
- Full width rear deck covered with 1 1/2" Apitong.



Optional self contained engine package.



The standard gooseneck has over 35" of vertical travel with the standard 84" radius. The optional 108" gooseneck radius shown here has over 42" of vertical travel.




Due to printing restrictions colors shown are representative only.

Front Loading

Carry roller, paver and broom
all in one load




- Hydraulic high lift (35" travel) non ground engaging gooseneck - wet line.
- Vertical gooseneck locking pin (air operated)
- Adjustable 5th wheel height (48"– 50"– 52"– 54").
- Hydraulic gooseneck support arm
- Main frame - 4 beam - 16" fully cambered
- 20" Crossmember spacing
- 22" deck height (adjustable - no blocks)
- 6" ground clearance (adjustable - no blocks)
- Adjustable width 41" front folding ramps (wood filled)
- Deck width - 8'-6" (102")
- 1 1/2" Apitong decking (full width)
- 3:1 sloped deck (18°) covered with 1 1/2" Apitong
- Air suspension. ± 3 " adjustable ride height
- Lash rings
- Two part urethane paint; standard colors black, red or yellow

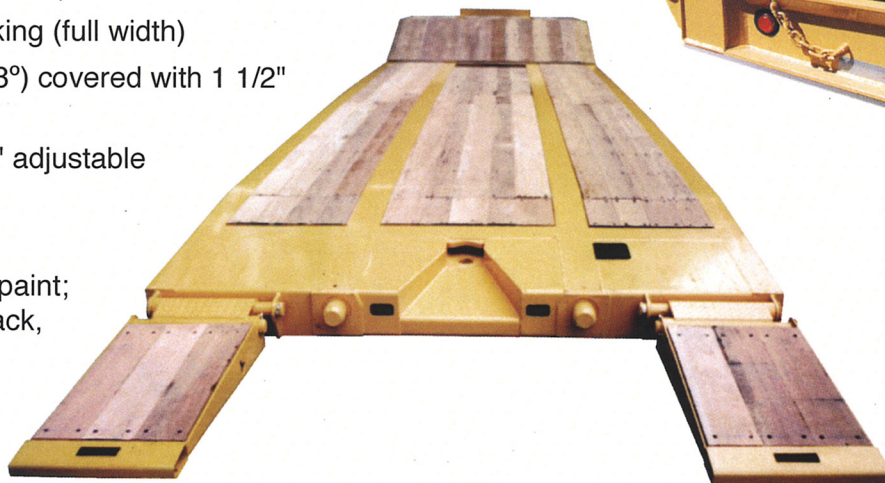

Photos in this brochure show both standard and optional equipment.


Front Loading Paver Special

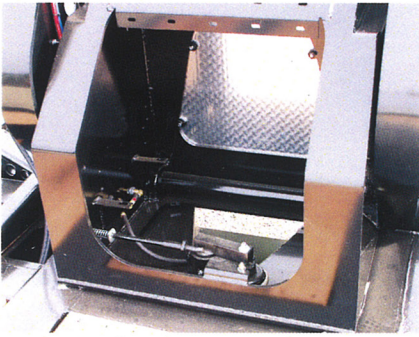

Air operated gooseneck lock pin



Hydraulically operated gooseneck support arm and gravel guard

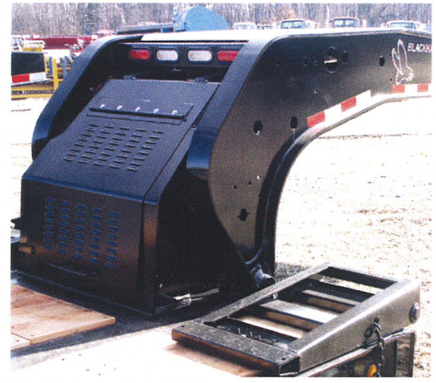

Optional gooseneck light bar and full lockable rear cover



Optional gooseneck storage area and optional gooseneck fenders



Bolt-on 1/8" aluminum floor plate gooseneck cove



Simple one hand adjustment of deck height and/or fifth wheel settings. No doors, shims or spacers



Distributed By:

 **Etnyre**
INTERNATIONAL

1333 South Daysville Road, Oregon, Illinois 61061
Phone: 800-995-2116 or 815/732-2116 • Fax 815-732-7400
Web Site: www.etnyre.com • Email: sales@etnyre.com
ISO9001:2000 certified

E. D. Etnyre & Co., whose policy is one of continuous improvement, reserves the right to change specifications without notice. Some items shown in photos and illustrations may be optional equipment.

L-PS-06

Updated February 5, 2024