



# Blackhawk Classic Series

**Heavy Duty Trailers**



## **Blackhawk Classic FEATURES**

- 4 beam main frame 16" fully cambered
- Simple, quick and easy hookups to any tractor air, electrical and hydraulic system
- High lift gooseneck has over 35" of vertical travel with 84" radius
- Hydraulically operated by PTO/wet line or optional power pack

# *Classic Series*

## BLACKHAWK Trailers


- Hydraulic non-ground engaging gooseneck.
- 4 beam main frame 16" fully cambered.
- Top flange reinforcement on outside flanges.
- Crossmembers are located on 20" centers. 1-1/2" net apitong flooring is standard.
- Boom well has the lowest first cross member in the industry to get those big new excavator sticks to their lowest height.
- Recessed boom trough and stubbed shock absorber mounting allow excavator sticks to be tucked into this area to lower overall height of excavators.



- Standard transition ramps.



- Optional amber LED strobe lights.
- Dropped bolsters and connecting ears for removable 4th axle.
- Frame reinforced for 4th axle.

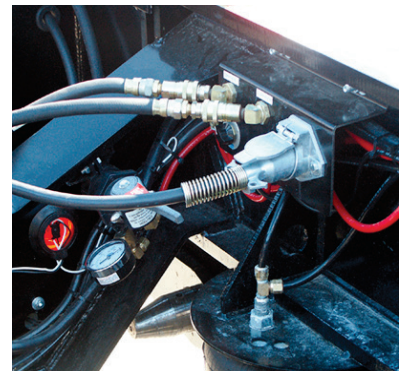


- Optional air/electrical connections for 4th axle.




Photos in this brochure show both standard and optional equipment.




## Blackhawk Classic Series 55 ton capacity trailers. Available in 3 and 4 axle configurations.

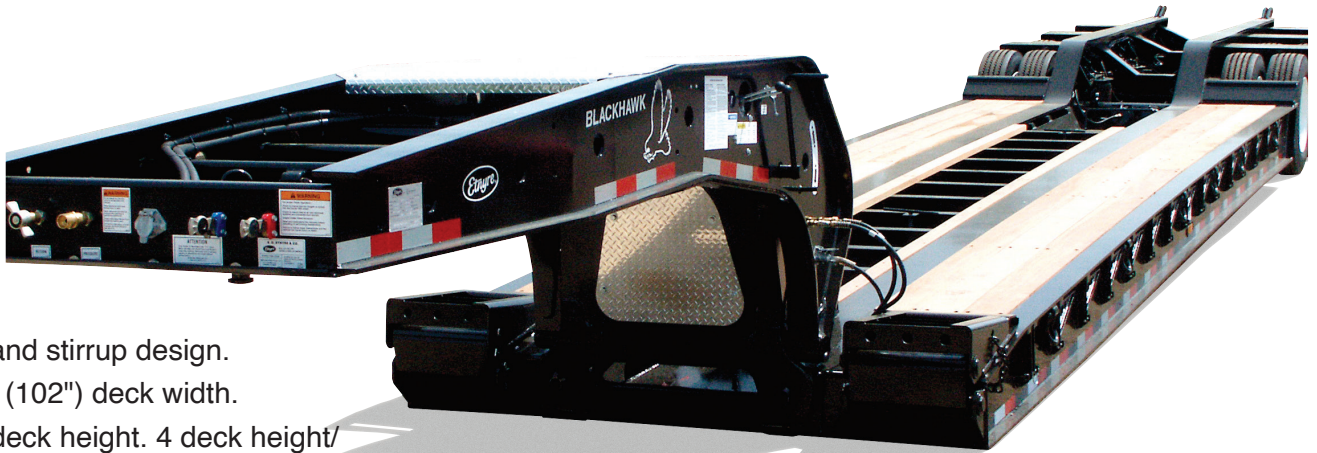

- Pin and stirrup design.
- 8'-6" (102") deck width.
- 22" deck height. 4 deck height/ground clearance settings.
- Hydraulically operated by PTO/wet line or optional power pack.
- Air suspension (spring available).
- Air brakes.
- Hydraulic gooseneck support arm.

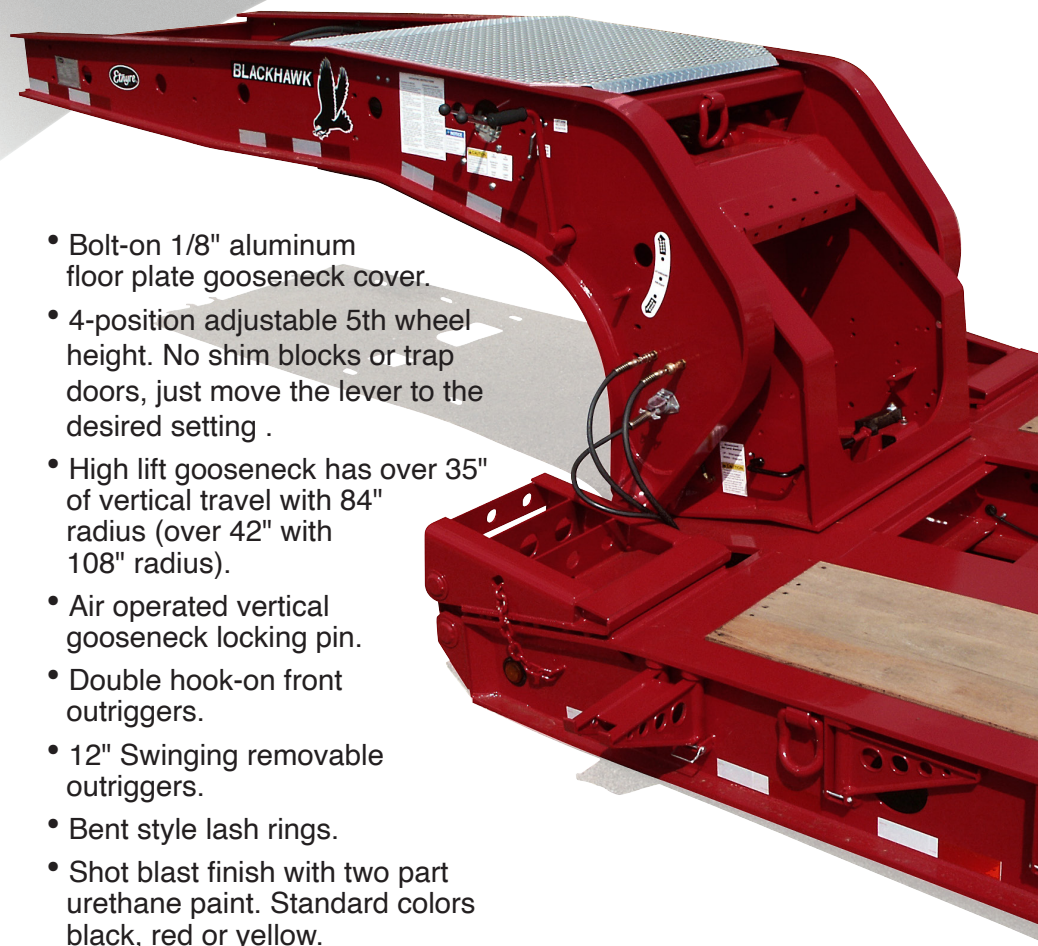


- Bolt-on 1/8" aluminum floor plate gooseneck cover.
- 4-position adjustable 5th wheel height. No shim blocks or trap doors, just move the lever to the desired setting.
- High lift gooseneck has over 35" of vertical travel with 84" radius (over 42" with 108" radius).
- Air operated vertical gooseneck locking pin.
- Double hook-on front outriggers.
- 12" Swinging removable outriggers.
- Bent style lash rings.
- Shot blast finish with two part urethane paint. Standard colors black, red or yellow.

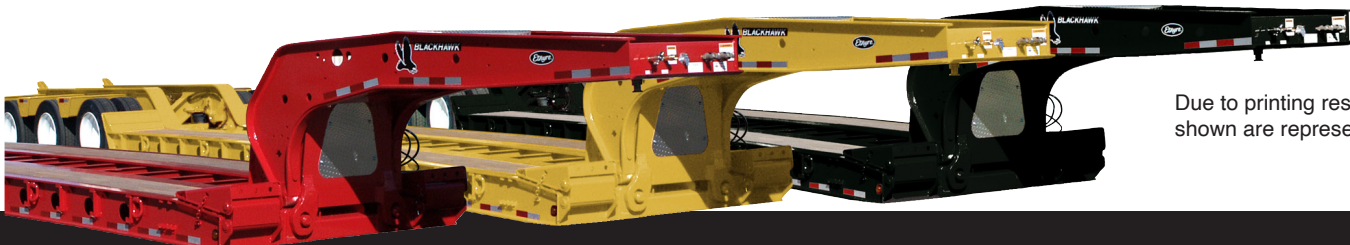

Due to printing restrictions colors shown are representative only.



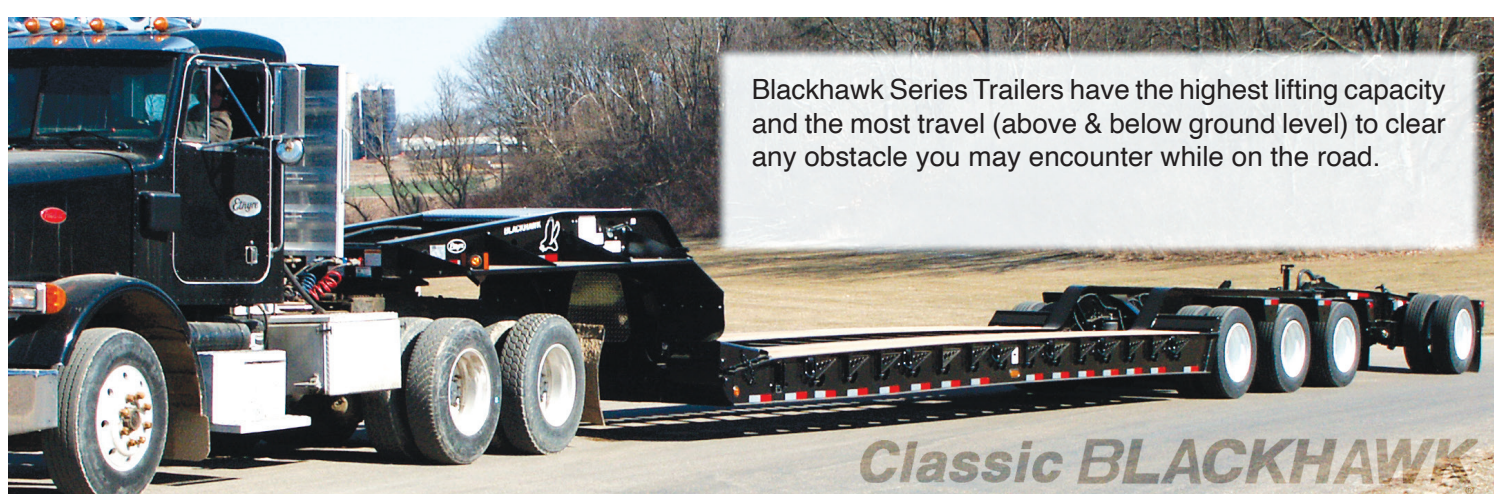


- Simple, quick and easy hook-ups to any tractor air, electrical and hydraulic system.



- High lift gooseneck.



- Optional 8' wide bolt-on fenders.

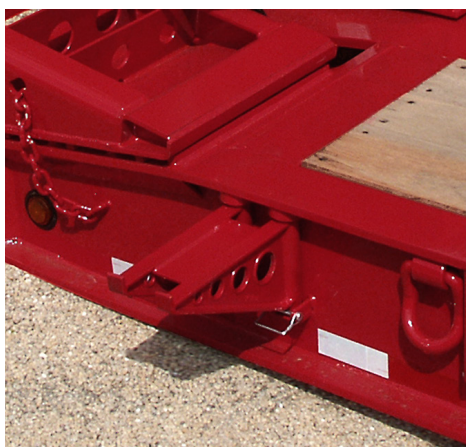

- Double hook-on outriggers standard equipment.



- Optional gooseneck light bar.
- Optional self contained engine package and cover.



- Optional 4th flip/removable axle with optional aluminum wheels.
- Optional stinger (spreader bar) available.

Distributed By:

**Etnyre**  
INTERNATIONAL

1333 South Daysville Road, Oregon, Illinois 61061  
Phone: 800-995-2116 or 815/732-2116 • Fax 815-732-7400  
Web Site: [www.etnyre.com](http://www.etnyre.com) • Email: [sales@etnyre.com](mailto:sales@etnyre.com)  
ISO9001:2000 certified

E. D. Etnyre & Co., whose policy is one of continuous improvement, reserves the right to change specifications without notice. Some items shown in photos and illustrations may be optional equipment.

**L-RTN-06**  
Updated February 1, 2024