


Dealer/Customer Approval _____ Date _____

Standard BLACKHAWK Trailers

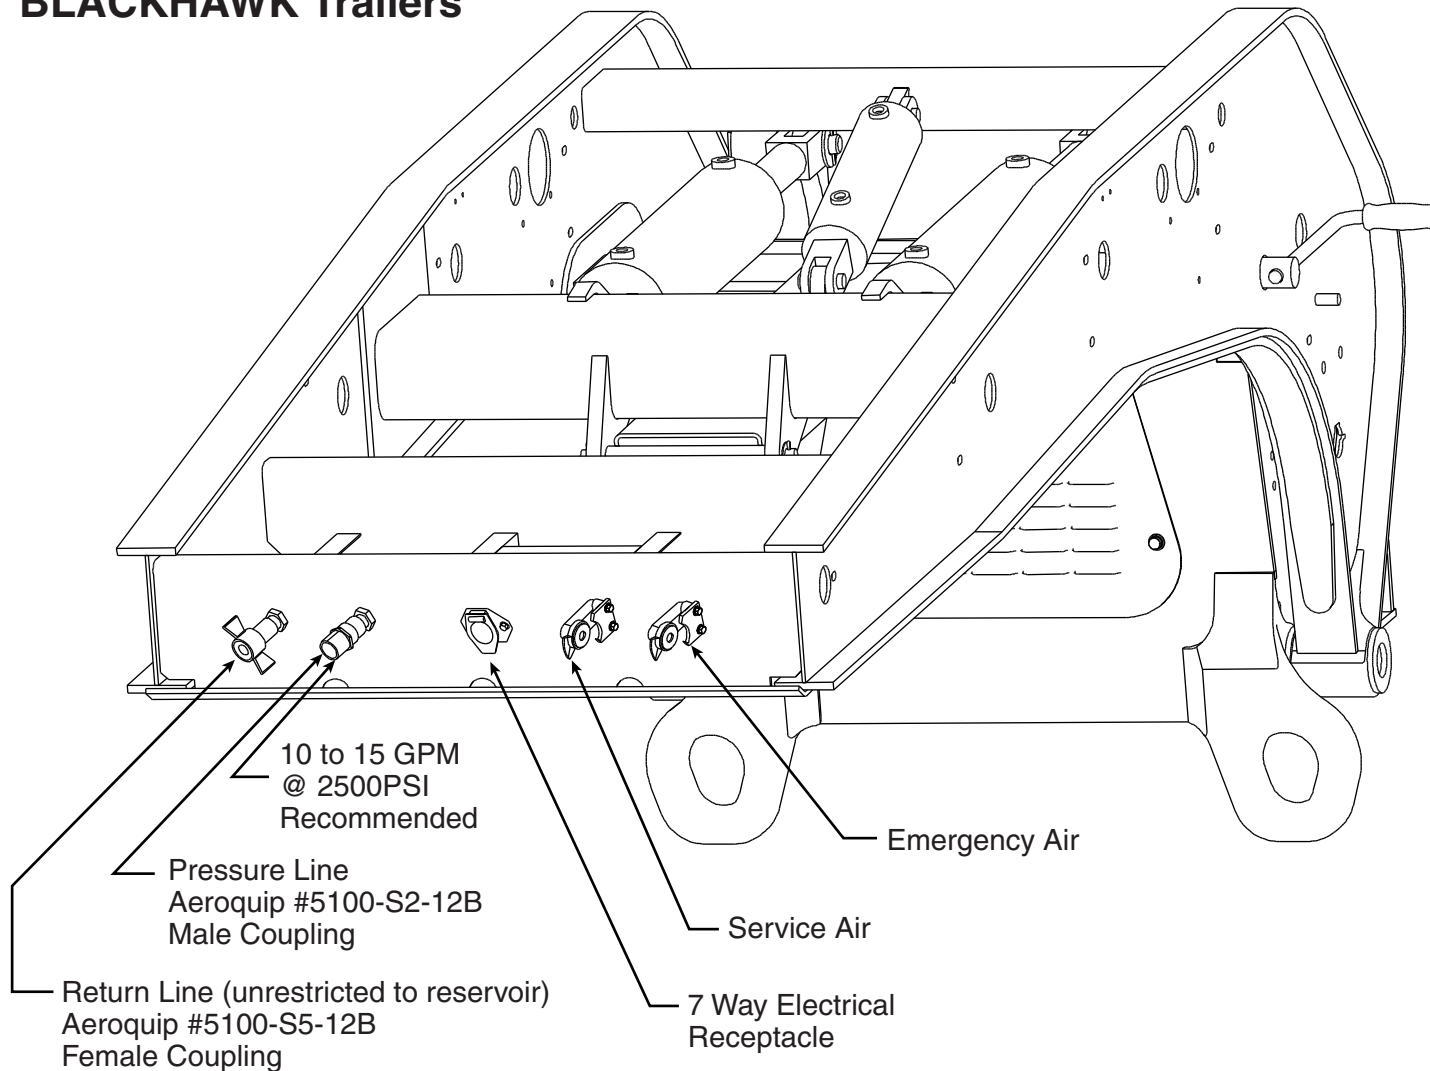

Pressure Requirements

1. Minimum: 7 to 10 Gallons Per Minute
2. 35 ton: 2,500 P.S.I
3. 55 ton: 2,500 P.S.I
4. 60 ton: 2,500 P.S.I

Tank Requirements

1. Minimum tank size: 10 gallons
2. Recommended tank size: 20 gallons

Filter Requirements

1. Hydraulic Return Line Spin-On Filter
2. 10 Microns filter rating
3. Minimum 20 G.P.M flow rating with 15 P.S.I. by-pass spring

E. D. ETNYRE & CO.
OREGON, IL. 61061

All dimensions in inches. Do not scale drawing

**HUDRALIC, ELECTRIC
AND AIR CONNECTIONS**

DRAWING NO. **RTN-2763**

DATE 6/3/02

Drawing is for illustrative purposes only. All weights and dimensions are approximate. Trailer is shown in fully loaded condition. Platform heights will increase if loaded less than full capacity.